




Dash Disassembly

Chrysler 300M 1999-2004/Concorde 1998-2004

Chrysler LHS 1999-2001/ Dodge Intrepid 1998-2004

1. Remove the ashtray by pressing down on the inner spring clip (Concorde only).
2. Unclip gear shifter trim panel and slide trim panel toward the rear of the vehicle.
3. Unclip dash trim panel and disconnect the wire to the trim panel.
4. Remove (4) Phillips head screws securing the radio. Disconnect and remove the radio.

Continue to kit assembly

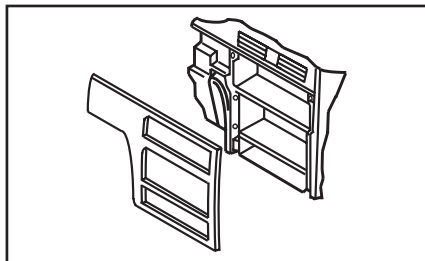


(Figure A)

Chrysler PT Cruiser 2001-2005

1. Unclip power window control panel. Disconnect and remove panel.
2. Pull off climate control knobs.
3. Unclip and remove the dash trim panel.
4. Remove (4) Phillips head screws securing the radio. Disconnect and remove the radio.

Continue to kit assembly




(Figure A)

Chrysler Sebring/Dodge Stratus 2001-2006

1. Remove (2) Phillips head screws from under the climate controls (Coupe only).
2. Unclip and remove radio trim panel.
3. Remove (4) Phillips head screws securing the radio. Disconnect and remove the radio.

Continue to kit assembly

Chrysler Sebring/Dodge Stratus 2001-2006




(Figure A)

Chrysler Town & Country/ Dodge Caravan 2001-2007

1. Open cup holder. Unclip and remove trim above cup holder.
2. Remove (2) Phillips head screws from above cup holder.
3. Unclip and remove the dash trim panel.
4. Remove (4) Phillips head screws securing the radio. Disconnect and remove the radio.

Continue to kit assembly



(Figure A)




Dash Disassembly

Dodge Neon 2000-2006 Plymouth Neon 2000-2001

1. Pull off climate control knobs.
2. Unclip and remove A/C and heater vents.
3. Remove (1) Phillips head screw from each vent cavity.
4. Unclip and remove dash trim panel.
5. Remove (4) Phillips

head screws securing the radio. Disconnect and remove the radio.
Continue to kit assembly




(Figure A)

Dodge Ram 2002-2005

1. Unclip the top edge of the trim panel below the steering column (it is not necessary to completely remove this panel).
2. Remove (1) Phillips head screw from below right A/C heater vent.
3. Unclip and remove dash trim panel.
4. Remove (4) Phillips


head screws securing the radio. Disconnect and remove the radio.
Continue to kit assembly




(Figure A)

Dodge Viper 2003-2009


1. Using a small flat blade screw driver, pry up on center console trim panel (take care not to scratch the trim panel). (Figure A)
2. Loosen the shifter lock nut below center console trim panel (Figure A) and unscrew the shifter knob. (Figure B)
3. Unplug electrical connectors and remove center console trim panel. (Figure C)
4. Remove (6) Allen screws from radio/climate control trim panel and (1) Phillips screw at the bottom of the panel.
5. Unplug electrical connectors and remove the panel. (Figure D)
6. Remove (4) screws securing the radio. Disconnect and remove the radio.
Continue to kit assembly




(Figure A)



(Figure B)




(Figure C)



(Figure D)

Jeep Grand Cherokee 1999-2004

1. Unclip and remove radio trim panel.
2. Remove (4) Phillips head screws securing the radio. Disconnect and remove the radio.
Continue to kit assembly



(Figure A)




INSTALLATION INSTRUCTIONS

Dodge Dakota 2001-2004/Durango 2001-2003

1. Remove (3) T-20 Torx screws from the bottom edge of the panel below the steering column and unsnap to remove panel.
2. Remove (2) Phillips screws from the instrument cluster panel above gauges.
3. Remove (3) T-20 Torx screws from the bottom of the steering column shroud and unsnap and remove the top half of the shroud.
4. Unsnap and remove entire panel surrounding radio, A/C controls, and instrument cluster.
5. Remove (4) Phillips screws securing radio. Disconnect and remove radio.

Continue to kit assembly




(Figure A)

Jeep Liberty 2002-2007

1. Remove ashtray and remove one Phillips screw exposed.
2. Unclip and remove radio/climate control panel.
3. Remove (4) Phillips screws securing radio. Disconnect and remove radio.

Continue to kit assembly




(Figure A)

Jeep Wrangler 2003-2006

1. Unsnap and remove defroster grille panel near windshield.
2. Remove (2) Phillips screws exposed at the top of the center dash panel and unsnap and remove panel.
3. Remove glove box door to access one 10mm nut on back of radio.
4. Remove (4) Phillips screws securing radio. Disconnect and remove radio.

Continue to kit assembly



(Figure A)